




TIP-ON

inside

TIP-ON for AVENTOS HK

The mechanical opening support system for handle-less stay lifts

Simply press and it opens

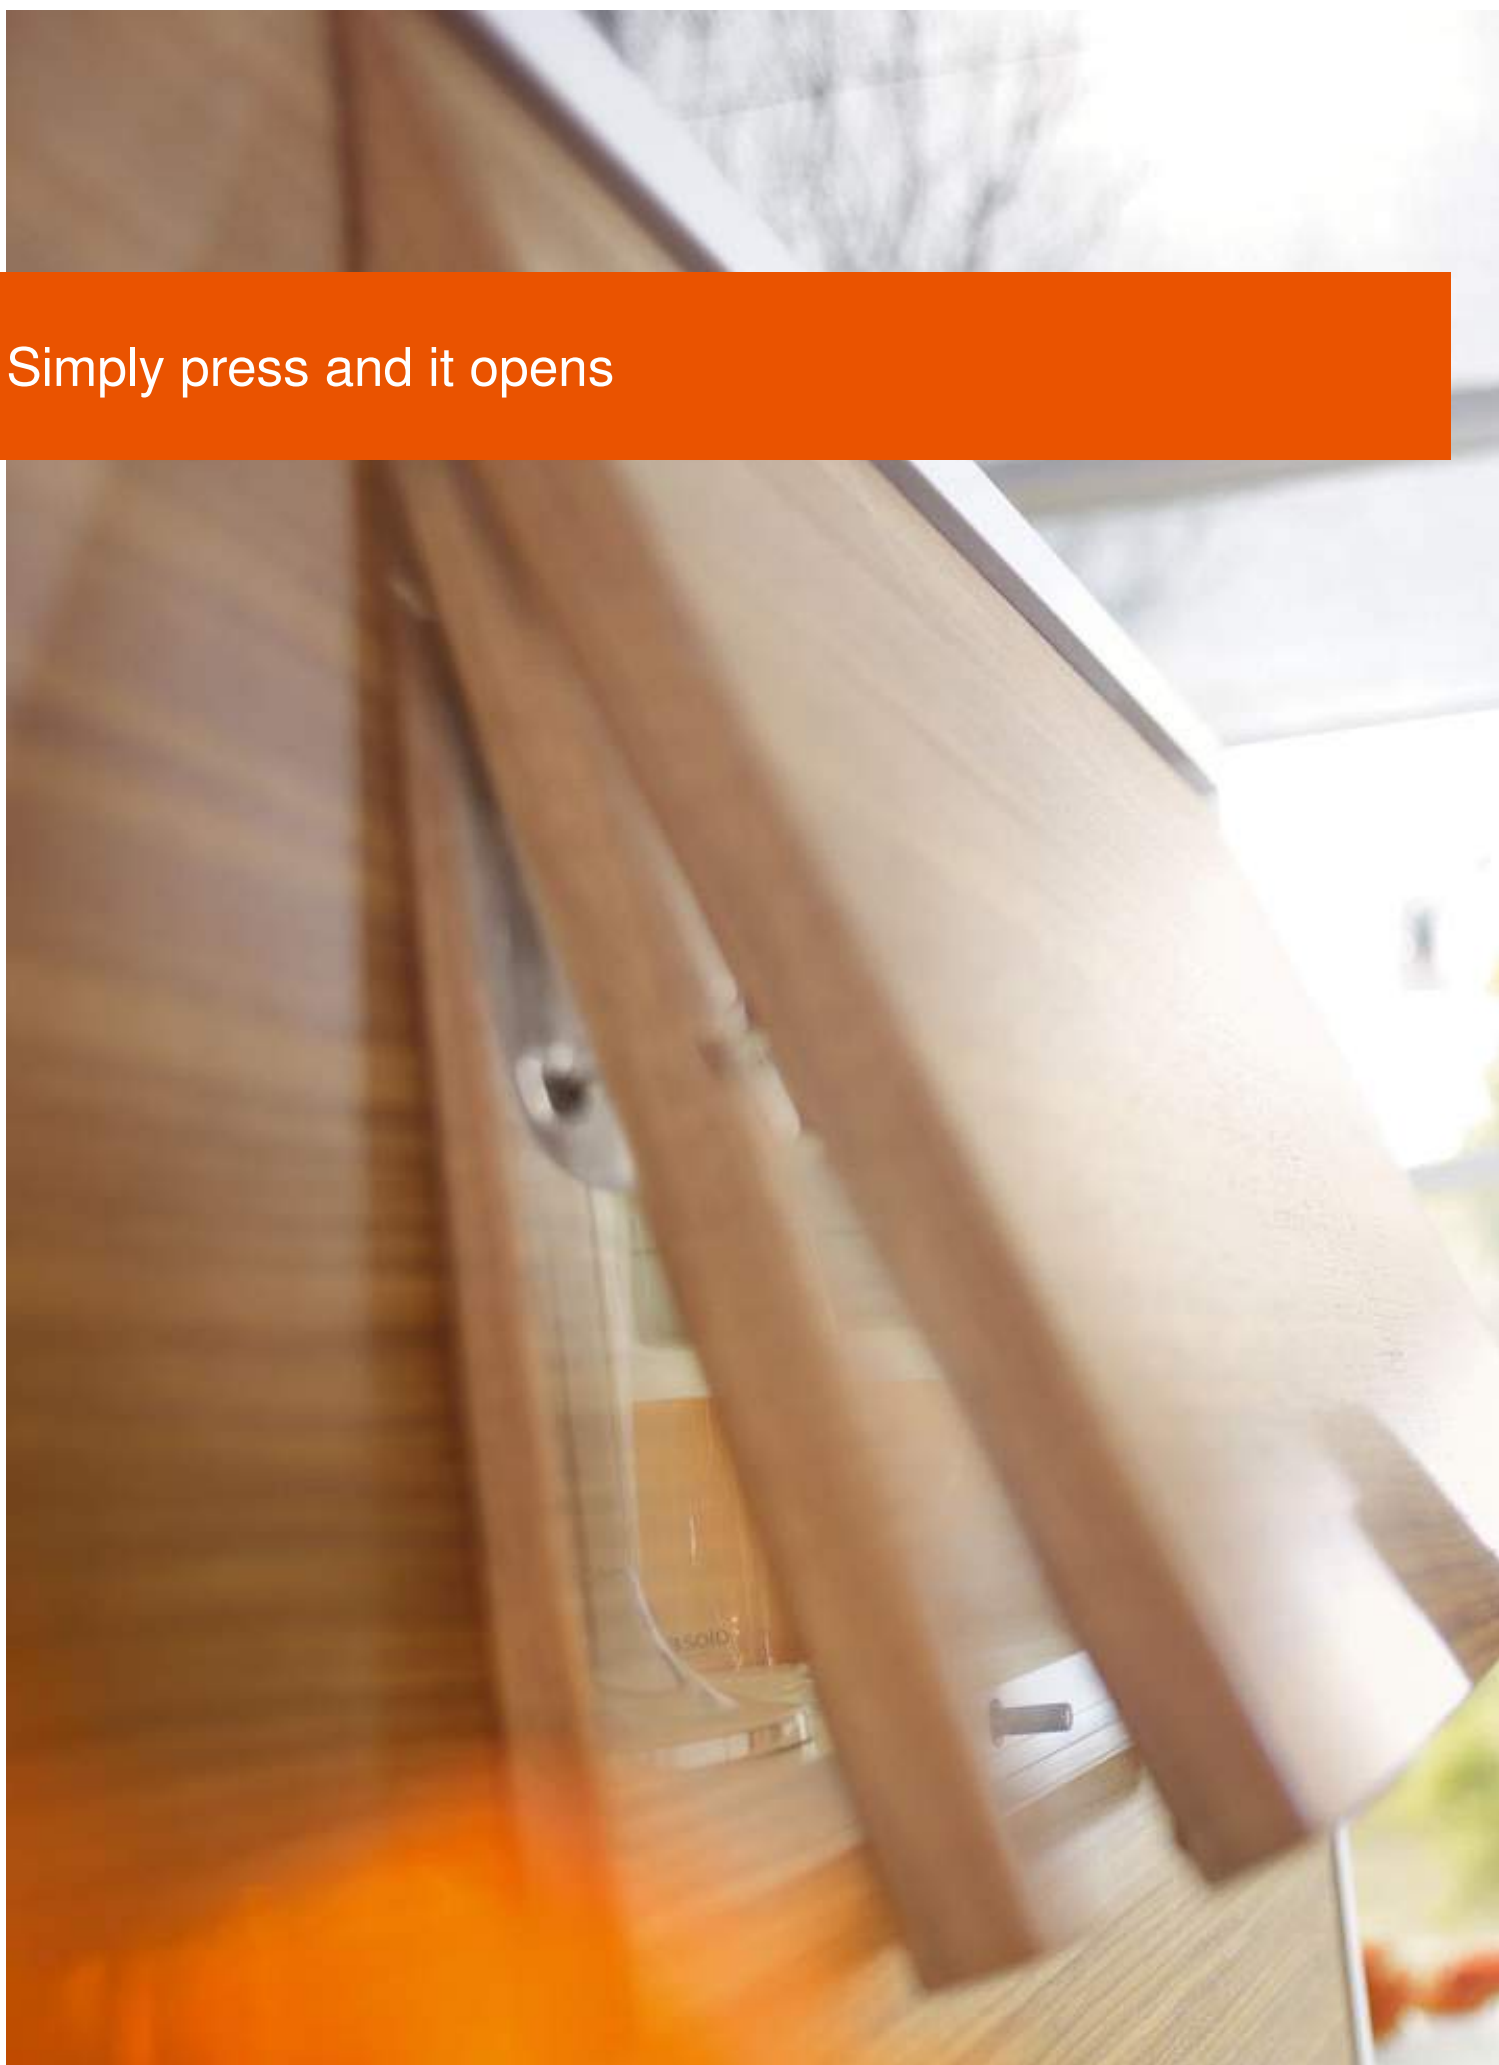



Easy of opening

for handle-less stay lifts

Whether it's the kitchen, bathroom, living room or bedroom – handle-less furniture has long been a popular element in modern furniture design. TIP-ON, our mechanical opening support system, makes it easy to open handle-less furniture (now also available for our AVENTOS HK fitting). Just a brief touch – and handle-less stay lifts open: This is surprisingly easy and very practical especially in the kitchen.



Content

- 4 Functionality that inspires
- 6 Components:
- 8 Assembly and adjustment
- 10 Order specification
- 12 Planning information
- 15 Assembly
- 16 TIP-ON is a versatile product
- 18 Perfecting motion

Functionality that inspires



Functional opening and secure closing



Opening handle-less stay lifts is very easy and effortless with TIP-ON for AVENTOS HK: Just press on the furniture front and the lift system opens far enough so that it can be easily moved upwards by hand.

To close, all you need do is press lightly on the lift system. The TIP-ON unit includes a magnetic catch plate that is attached to the inside of the front ensuring secure closing.

TIP-ON for the entire kitchen


Handle-less stay lifts can now also be opened with TIP-ON along with handle-less doors and pull-outs. The AVENTOS HK lift mechanism has been specially designed for TIP-ON. Whether it's the bathroom, living room or bedroom – the functional opening comfort of TIP-ON also inspires in other living areas.



TIP-ON – user-friendly and high quality

- The TIP-ON mechanism remains undamaged even when the lift system is raised manually.
- This innovative Blum solution is made of high-quality components and will last for the lifetime of the furniture.

Components:

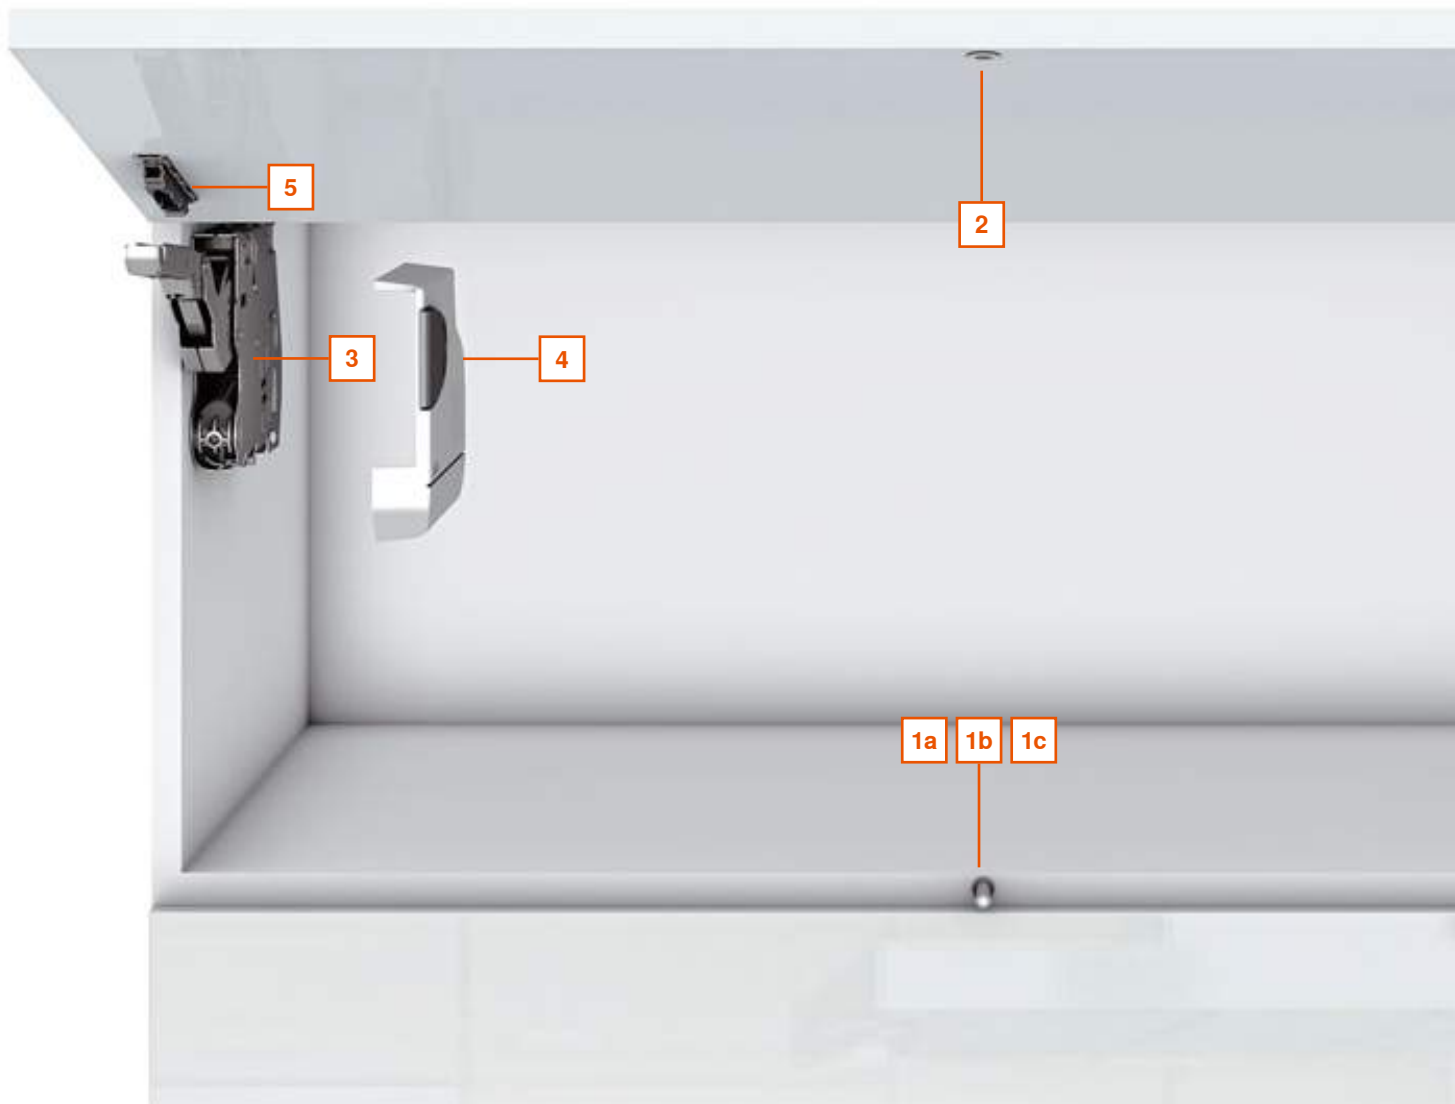

All TIP-ON for AVENTOS HK components at a glance



1a TIP-ON unit for drilling



1b TIP-ON unit horizontal adapter plate



1c TIP-ON unit cruciform adapter plate



2 Screw-on catch plate



The mechanical opening support system for the AVENTOS HK stay lift is characterised by a manageable programme. All common stay lift dimensions can be implemented.

The TIP-ON unit comes in two versions: a standard version for cabinet heights under 500 mm and a long version for cabinets 500 mm and higher.

i

Note

The glue-on catch plate should not be used in combination with TIP-ON for AVENTOS HK



3 Lift mechanism specially designed for TIP-ON for AVENTOS HK



4 Standard cover caps



5 Standard front fixing bracket

Assembly and adjustment

Assembly in just a few steps

We have even paid attention to extremely easy assembly for TIP-ON for AVENTOS HK – as with all of our other products. The assembly of individual parts takes just a few steps.



1. TIP-ON assembly is carried out in the centre of the cabinet bottom panel. Our drilling template makes this quite simple.



2. For assembly with an adapter plate, the plate is attached to the centre of the cabinet bottom panel.



3. The TIP-ON unit can also be attached to the side of the cabinet panel.



4. The screw-on catch plate is screwed in by hand.



5. The lift mechanism is attached quickly and easily to the cabinet.



6. After removing the transportation lock, the lever on the lift mechanism can be opened.

Exact fine adjustment, fast adjustment

Final adjustment can also be carried out safely and easily: The fine adjustment to opening and closing forces is carried out via the lift mechanism. A calibration feature helps in this regard. Then the front height, width and tilt can be set exactly in 3 dimensions.

Perfect motion requires a precise setting:




The fine adjustment to the opening and closing forces on the lift mechanism is made using an electric screwdriver (Pozidriv®, size 2, length 39 mm).



If the lift system falls when let go, it must be turned to the right.



If the lift system rises when let go, it must be turned to the left.



Warning


There is a danger of injury if the lever springs upward. After opening, do not push down on the lever.

Special warning and safety information must be added for use in North America.



The front can be set in 3-dimensions by hand.

Order specification

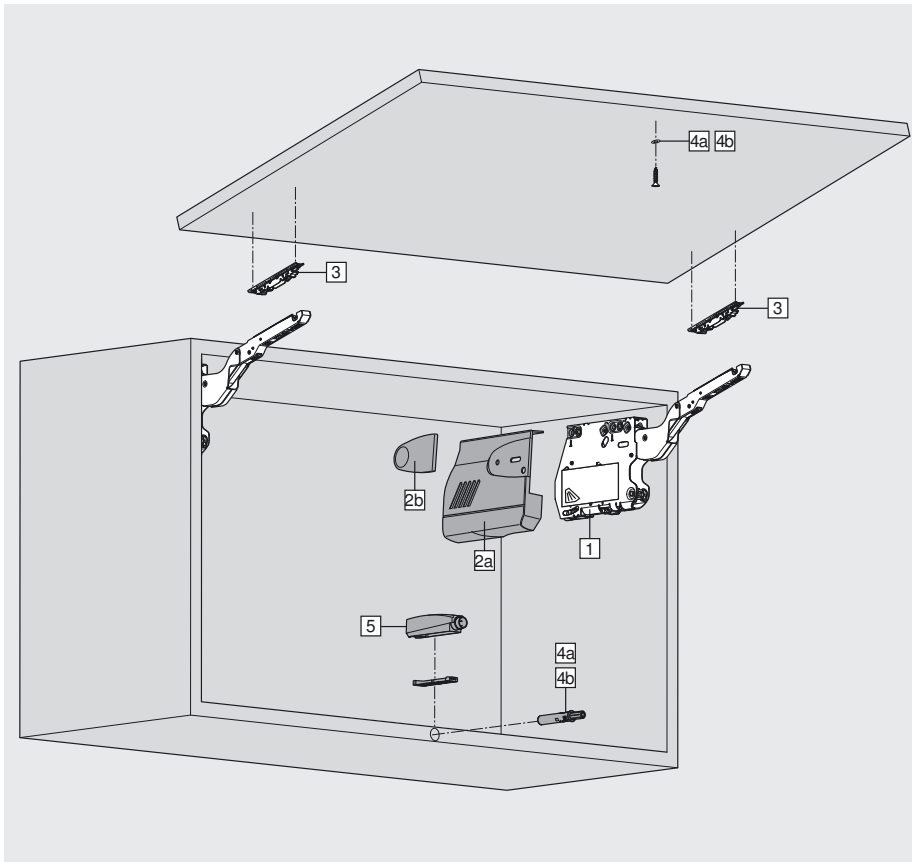


4 types of lift mechanisms are enough to cover a wide range of applications.

Using the power factor, you can calculate the required lift mechanisms. The power factor required depends on the weight of the front and the cabinet height.

When using a third lift mechanism (a power factor increase of up to 50 %), we recommend a trial application.



This is how it's done: Power factor = cabinet height (KH) [mm] x door weight

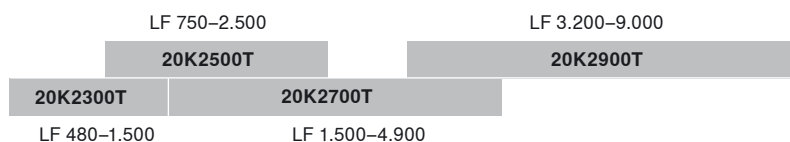

■ Lift mechanism two-sided


LF Power factor


A trial application is recommended when you are in a borderline area for the individual lift mechanism.


1	Lift mechanism set		
	Power factor LF	Opening angle	
	480-1.500	107°	20K2300T
	750-2.500	107°	20K2500T
	1.500-4.900	107°	20K2700T
	3.200-9.000	100°	20K2900T
	Max. door weight 18 kg for two lift mechanisms		
	Composed of:		
	2 x symmetrical lift mechanisms		
	6 x chipboard screws, Ø 4 x 35 mm		





2	Cover cap set	
	light grey, silk white, nickel-lacquered	
		20K8000
	Composed of:	
2a	2 x cover plates left/right	
2b	2 x cover caps small	


3	Front fixing bracket set	
	Nickel plated	
	Wooden fronts and wide alu frames ¹⁾	20S4200
	Narrow alu frames	20S4200A
	Composed of:	
	2 x symmetrical front fixing brackets	


4a	TIP-ON "standard" set	
	For drilling Ø 10 x 50 mm	
	RAL 7037 nylon, dust grey	955.1004
	With magnet	
	Output path approx. 18 mm	
	for fronts up to a height of 500 mm	
	Incl. glue-on and screw-on catch plates	


4b	TIP-ON "long version" set	
	For drilling Ø 10 x 76 mm	955A1004
	RAL 7037 nylon, dust grey	
	With magnet	
	Output path approx. 38 mm	
	For front heights over 500 mm	
	Incl. glue-on and screw-on catch plates	


5	Adapter plate	
 Icon image	Horizontal adapter plate	
	Zinc, nickel plated	955.5201
	Nylon 7036 platinum grey	955.1201
	Cruciform adapter plate	
	Nylon 7036 platinum grey	
	Screw-on	955.1501
	EXPANDO	955.15E1
	TIP-ON must be ordered separately	
	Assembly with chipboard screws Ø 3.5 mm or Ø 4mm	


	Opening angle stop		
	Nylon		
	100°	2 x	20K7041
	75°	2 x	20K7011

	Universal individual template	
	For pre-drilling peg positions for all AVENTOS lift mechanism types	
		65.1051.01

	Drilling template	
	For drilling TIP-ON	65.5010

	Template	
	To pre-drill fixing positions of adapter plates	65.5310

	Catch plate positioning template	
	For determining the screw-on position of the TIP-ON catch plate	65.5210


	Bit PZ cross slot	
	Size 2, length 39 mm	BIT-PZ KS2

¹⁾ Use 4 chipboard screws (609.1x00) for wooden fronts. Use 4 counter sunk self tapping screws (660.0950) for wide alu frames.

Notice: The glue-on catch plate should not be used in combination with TIP-ON for AVENTOS HK

Planning information


Peg positions for lift mechanism

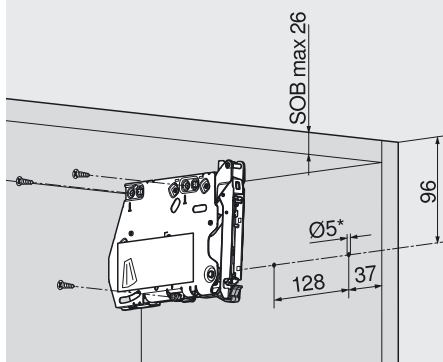

* Drilling depth 5 mm

SOB Top panel thickness


Fixing positions for lift mechanism



* left ** right


3 x Ø 4 x 35 mm

Space requirement

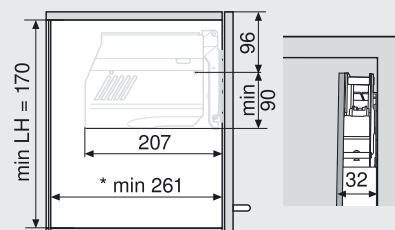

* min. 261 with visible wall hanging bracket

Front assembly

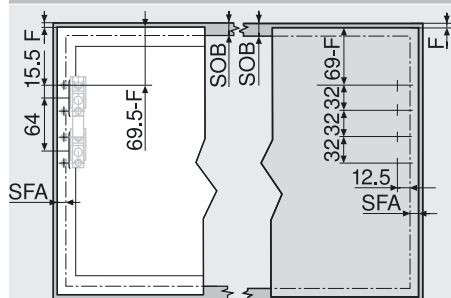

Narrow alu frames

Wooden fronts and wide alu frames¹⁾



Wall application: Requires 5 mm min. gap

SOB Top panel thickness

F Gap

SFA Side front overlay

Planning narrow alu frames

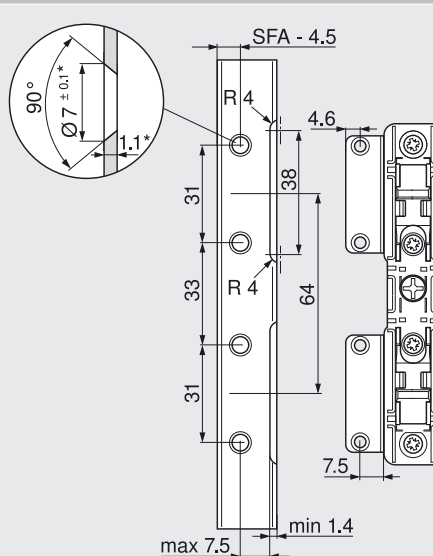


SFA Side front overlay

For frame width 19 mm, a SFA of 11-18 mm is possible

* When changing material thickness, adjust the assembly dimensions accordingly

Cornice and crown moulding clearance

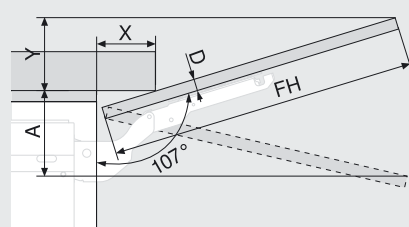

D (mm)	16	19	22	26	28
X (mm)	70	59	49	35	26


Without OEB $Y = FH \times 0.29 - 15 + D$

OEB 100° $Y = FH \times 0.17 - 15 + D$

OEB 75° $A = FH \times 0.26 + 15 - D$


OEB = Opening angle stop

Minimum gap



MF Minimum gap for opening (2 mm)

Cabinet assembly

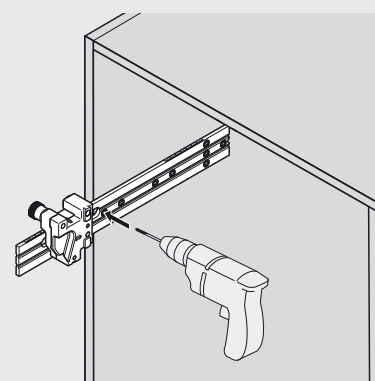


¹⁾ Use 4 chipboard screws (609.1x00) for wooden fronts. Use 4 counter sunk self tapping screws (660.0950) for wide alu frames.




TIP-ON fixing position

Standard



For fronts up to a height of 500 mm


Long version



For front heights over 500 mm


TIP-ON installation dimension

Standard

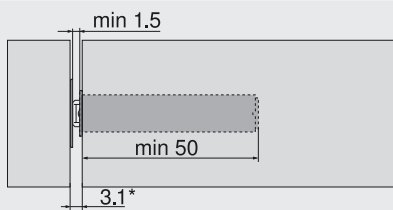


* min. 3.1 mm with screw-on catch plate

Long version

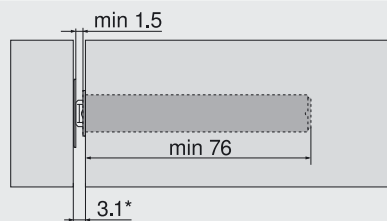


Adapter plate fixing position

Horizontal adapter plate




Cruciform adapter plate




Adapter plate installation dimension

Horizontal adapter plate

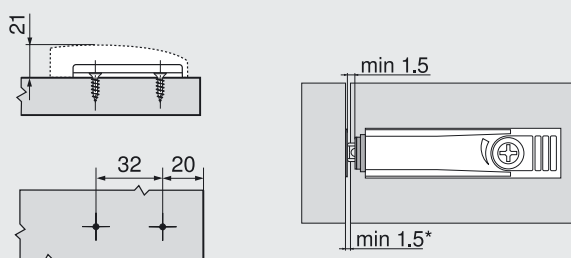



* Factory setting = 2 mm

Cruciform adapter plate

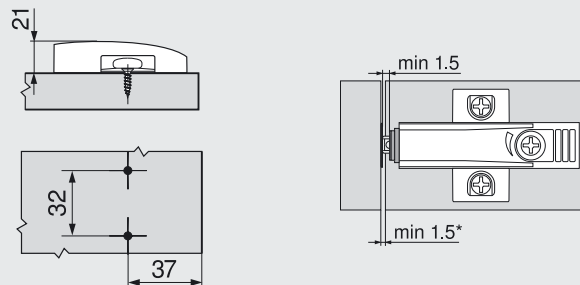


* Factory setting = 2 mm


Screw-on catch plate planning



For drilling



Horizontal adapter plate




Cruciform adapter plate

* We recommend setting back the positioning of TIP-ON by 3 mm for the screw-on catch plate.


FAU = Lower front overlay



For drilling




Assembly





Screw-on catch plate

Horizontal adapter plate




Assembly





Screw-on catch plate

Cruciform adapter plate





Assembly



Screw-on catch plate

Adjustment



TIP-ON is versatile

Always a **reliable**
handle-less solution



TIP-ON for AVENTOS HK provides functional, mechanical opening support for stay lifts. With versatile application options, it rounds off our product line for easy opening of handle-less furniture. It provides an opening support system for pull-outs, doors and lift systems – in other words for the entire living area.



TIP-ON – Advantages at a glance:

- Easy to open with just a touch
- Secure closing by pushing
- Easy assembly and adjustment

For more information and to download our brochures, go to:
www.blum.com

Comfort for the wall and base cabinet

Other TIP-ON solutions for functional opening comfort:



TIP-ON for TANDEMBOX

The solution for steel handle-less pull-out systems is characterised by extreme ease. A light touch is enough and the handle-less pull-outs open easily and effortlessly.



TIP-ON for TANDEM

The mechanical ease of opening of TIP-ON is also available for handle-less wooden pull-outs and drawers.



TIP-ON for doors

The same opening comfort available for handle-less metal and wooden pull-out systems is also available for handle-less doors. Simply press.

Perfecting motion



Our understanding of perfect motion

Blum turns the opening and closing of furniture into an experience that significantly increases the comfort of motion in the kitchen. Several thousand employees are continually working worldwide implementing our concept of perfect motion. Within this process, we place the needs of the kitchen user as the focus of our actions. We are only satisfied when the kitchen user is satisfied. All of our partners who participate in the furniture making process profit from this focus.

For over 50 years, quality has been the highest principle for the development and manufacture of our products. Our fittings systems shout "high quality" with their well-thought-out function, recognised design and high durability. They are designed to inspire and trigger fascination for perfect motion. We also set the bar very high for the services we offer. They must provide the best possible support to our partners.

So that we can target our efforts at all levels, we are in a constant dialogue with kitchen users and regularly exchange information with furniture manufacturers, joiners and distributors.





Julius Blum GmbH
Furniture Fittings Mfg.
6973 Höchst, Austria
Tel.: +43 5578 705-0
Fax: +43 5578 705-44
E-mail: info@blum.com
www.blum.com

All content is copyrighted by Blum.
Subject to technical modifications and changes to the range without notice.
Printed in Austria · ID NO.: XXX.XXX.X · EP-164/2 EN-AL/03.12-1 LIGHTHOUSE.de